

Feeding Technology



Feeding systems for stationary use

**Efficient and intelligent feeding with easy feed,
the new generation vibratory bowl feeder.**

- **Approx. 80 % energy savings**
- **Smart factory/Industry 4.0-capable**
- **Efficiency and worldwide application - one design for all markets**

Feed systems are essential for productivity and efficiency in automatic assembly machines. Originally developed for shaft-heavy screws, today's DEPRAG feeding systems are capable of processing screws of all types with or without washers, threaded bolts, pins, rivets, nuts, washers, o-rings and diverse other small components.

Over 40 years of experience in the development and manufacture of feeding technologies and the high standards of our production site guarantee products of consistent outstanding quality.





Vibratory Bowl Feeder
easy feed

OUR RANGE ON FEEDING SYSTEMS

Vibratory Feeder

Stationary feed systems for the processing of small components of all kinds, such as screws, pins, bolts, rivets, nuts, washers and o-rings. Vibratory feeders feature a high output rate in comparison to other feed systems.

We offer stationary screwfeeders with vibratory drive for screws < M1 to M20. Screws with a shaft length from 5 mm up to 130 mm can be processed. Even countersunk screws can be fed easily by our vibratory feeders.

→ Technical data can be found on pages 8 to 12.

→ Technical data Nut Feeders (Vibratory Bowl Feeders) can be found on page 14.




Sword (Segment)
Feeder

Sword (Segment) Feeder

Sword feeders or segment feeders are used when the requirement calls for gentle, almost noiseless feeding of sensitive fasteners. Our sword feeder systems can process screw sizes from M2 to M6. They are ideal for screws up to 25 mm in length. Sword (segment) feeders are also well-suited for the processing of balls and pins.

→ Technical data can be found on page 13.

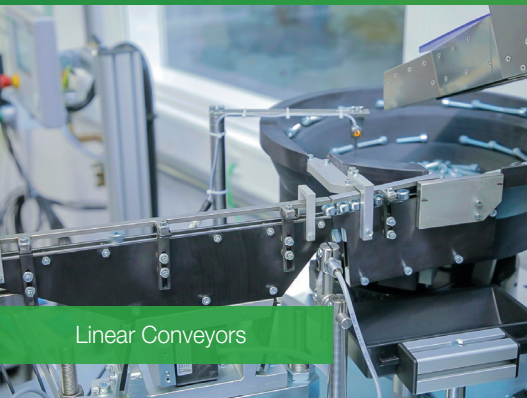

Linear Conveyors

Linear Conveyors

Our linear conveyors are part of a sophisticated feeding system, which can, for example, in combination with vibratory feeder or Pick-and-Place systems, be coordinated to your application. Linear conveyors can be used to transport parts over larger distances within your assembly system, to allow for a parts buffer or to allow for the constant and consistent flow of parts.

Our robust linear conveyors enable correct sorting in the feedbowl, thereby preventing jams or parts becoming wedged or backed up to the feedbowl.



Pick-and-Place
Method

Pick-and-Place Method

Pick-and-Place method - the alternative to feeding through a hose - independent from the part's geometry!

If the screw dimensions do not allow feeding through a feedhose, for example where there is an unfavorable relation between screw head diameter and overall length, we can offer special solutions, such as the pick-and-place procedure with vacuum suction or removal by gripper.

This process can also be used for screw locations which are difficult to access.

For stationary applications, either vacuum technology or grippers are predominately used on Pick & Place devices. The release- and reload procedure, is controlled by a PLC using sensor monitoring.


More feeding systems from our range

Step Feeder	→ Catalog D3835E
Mini Screw Feeder	→ Catalog D3836E
Tape-on-Reel Feeding	→ Catalog D3870E
Screw Presenters	→ Catalog D3840E
Storage Systems	→ Catalog D3850E

STRUCTURE OF STATIONARY SCREW FEEDING SYSTEMS

DEPRAG screw feeders consist of the supply system itself, an air connection, a power switch and an electronic controller including feedhose, in standard length 4m.


With either sword feeder or vibratory bowl feeder

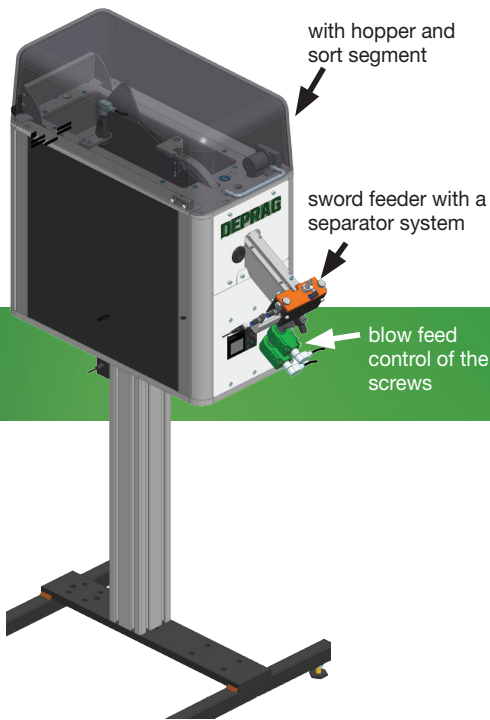

screw separator


with single or double spiral bowl

can be combined with any screwdriver model



If feeding with a hose system is not possible, we offer special solutions, such as the pick-and-place procedure

defined pick-position with integrated screw pick control option



Distributor system see page 3


ACCESSORIES

Distributor


If more than two positions (i.e. screwdriver spindles) have to be supplied out of one feeder, then so called pre-separation hose nozzles can be used. These distributors can supply 2, 3, 4, 5 or even 6 channels.

To increase the feed rate the distributors can be operated by pre-separators (version "V").


With such a system, the feed parts separator can be operated parallel to the processing time. The feeding of the hardware will be done simultaneously for all channels. This type of feed system is also used when feeding has to be done against gravity (i.e. underfloor assembly).

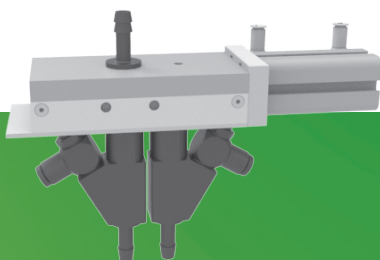


Distributor with hose nozzles that connect to an additional air-blast

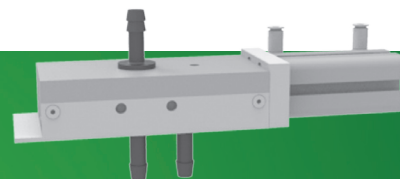

Distributor with standard hose nozzles

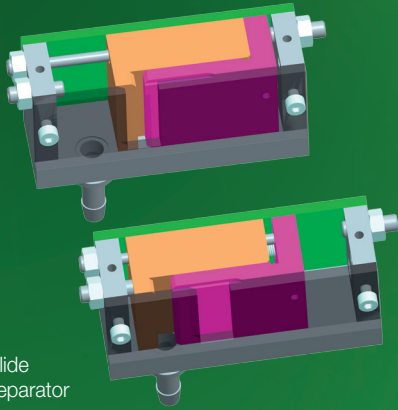


Slide separator

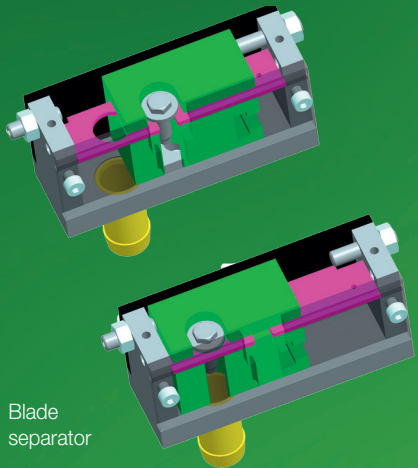

Blade separator



PFCi100 Controller



PFC100 Controller



PFC18L Controller

ACCESSORIES

Screw separator

The screws exit the feed bowl in a well ordered line ready to be separated at the end of a retaining rail. Different types of separators can be provided depending on the geometry of the material (e.g. screws).

Control

The **standard version (version „0“)** of the feeding systems, neither pneumatic valves nor a sequence controller are included. Only the control unit is installed as standard in the vibratory bowl feeder. The necessary pneumatics, as well as sequence controller are the essential components of a complete assembly unit. If components are ordered, the corresponding pneumatic and function diagrams are made available.

To keep design costs to a minimum and to simplify installation, all devices can be supplied with pneumatic valves. There is wiring up to the terminal block (version “P”). Again, if components are delivered we will provide an terminal plan.

The version “P” includes all necessary valves for the operation of the screwfeeding machine.

The third available version with the designation “EP” offers screwfeeding machines with 1 to 4 outlets, and includes pneumatic and electronic sequence control. To feed the next screw, only a 24 V signal is necessary. This means the customer can use a smaller PLC and no programming is necessary for the screw feeding. Therefore, the series “EP” is an especially economical and reliable solution and should be given preference.

Control Units

We offer different control units to control our vibratory drives.

- **Piezo Controller** is used for bowl sizes of 0.05 l (0.01 gal.)
- **Feeder Controller PFCi100 / PFC100 for easy feed feeding systems** is used for bowl sizes of 0.15 l (0.04 gal.), 0.75 l (0.2 gal.), 1.2 l (0.32 gal.) and over 2.5 l (0.66 gal.) capacity

These units conform to the protection type no. IP54. A soft start feature is integrated into the control unit of the vibratory drive.


PFC18L Controller (IP30 protection class) to control our 1.5 liter sword feeders.

- operational voltage 24 V/DC
- little power consumption
- 10 different menu languages
- illuminated display
- power unit with extended voltage range (115 V – 230 V)
- independent from the respective local A/C voltage
- one design for all markets


Additional accessories

To complete the automatic assembly station, we provide additional components, such as:

- Standard mouthpiece
- Tilttable mouthpiece
- Nosepiece ball type, single
- Nosepiece ball type, double
- Nosepiece ball type with extension
- Nosepiece split type
- Nosepiece with attachment piece
- Ring proximity switch for screw presence sensors
- Fill level indicator
- Feeder stand
- Base for feeder stand
- Storage devices (Catalog D3850E)



Nosepiece



Special nosepiece with mouthpiece

MATERIAL TO BE CONVEYED

Screws or o-rings, nuts or threaded pins, rivets or balls: Different components and fasteners require different feeding methods. Special provisions come into play for applications requiring technical cleanliness and for sensitive parts requiring particularly gentle handling.

A vibratory feeder or a sword feeder can be used for the processing of **screws**, depending on screw size. Our screw presenter is ideal for the first step in screw supply automation.

For the processing of **pins**, we recommend a vibratory feeder. For standard applications we can offer handheld feeding systems. An adapted separator is often used for stationary applications.



A vibratory feeder is well-suited for the processing of **nuts**. There are handheld and stationary solutions for the presentation of nuts.

A vibratory feeder is the bestsuited device for the processing of **O-rings** into an assembly solution. In a stationary application: The O-ring is supplied to a pick-up position, stretched and assembled.

Wide-ranging component designs can be processed using a vibratory feeder in combination with a linear-conveyor system. We can utilize sensors so that the most varied of component geometries can be processed, particularly in stationary feeding systems.



Small parts attached to a backing film on a tape-reel needing to be picked-up by vacuum or gripper, can be processed by a DEPRAG tape-on-reel feeder. It is even possible to process components on both single- and double-sided adhesive tapes.


The DEPRAG tape-on-reel feeder predominately retrieves **labels**, stickers, and a protective film arriving on a tape-reel, by utilizing vacuum assistance.


We supply standardized pressinsertion systems, consisting of a press-in device that is combined with a vibratory or sword feeder, to process rivets, pins, sleeves, and balls.

Sword (segment) feeders are especially suited for gentle feeding procedures. Vibratory Feeders can also be coated with a fibre coating or soft PUR-coating which protects the surface quality of your components. A storage device can be set to keep the filllevel of the feeding system to an absolute minimum which again serves to protect the surface quality of your components. If your components need even gentler handling then we can palletise them and process them by a gripper or vacuum handling system.

A vibratory feeder in connection with a suction device can be used to process components in cleanrooms class D. If your cleanroom requirement is even higher, then a palletised solution with gripper or vacuum handling can be used.

Please contact us for additional information.

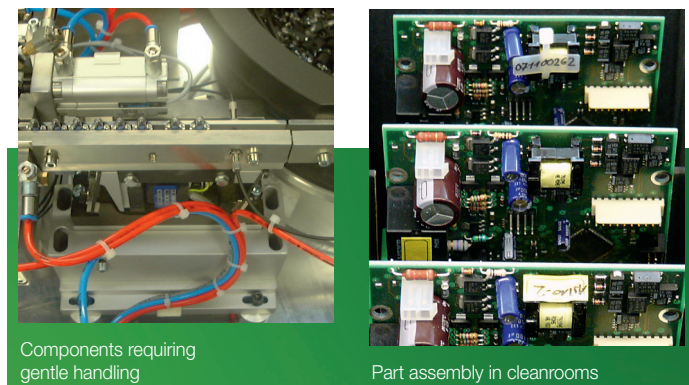

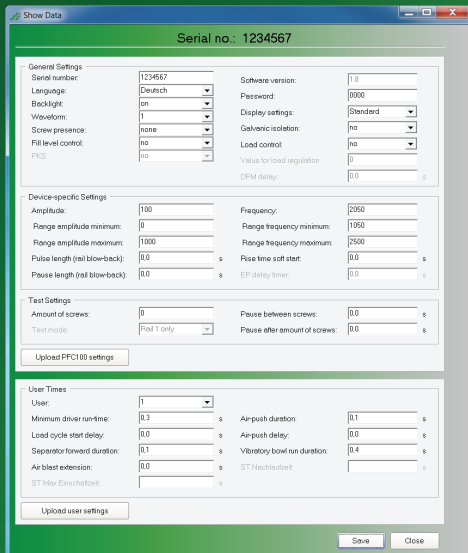

SOFTWARE SOLUTIONS

PFC100 Manager – the parameterisation software for PFC100 controllers

The PFC100 Manager facilitates the reading and saving of parameters as text files for every PFC100 controller. Saved parameters can be transferred to any PFC100 controller quickly and simply using the PFC100 Manager.

The connection cable 385520B required to connect the PC and PFC100 must be ordered separately.


The software download is available from the myDEPRAG customer portal (my.deprag.com). Registered users can activate the activation code and manage licences in MY ACCOUNT > DEPRAG Apps.

Part number:
Software PFC100 Manager, activation key – part no. 122000

Further information can be found in our catalog D3900E or on our website www.deprag.com.

NOMENCLATURE OF FEEDERS


i. e. 0 10 1 1 - 3 - P / 2.5 V

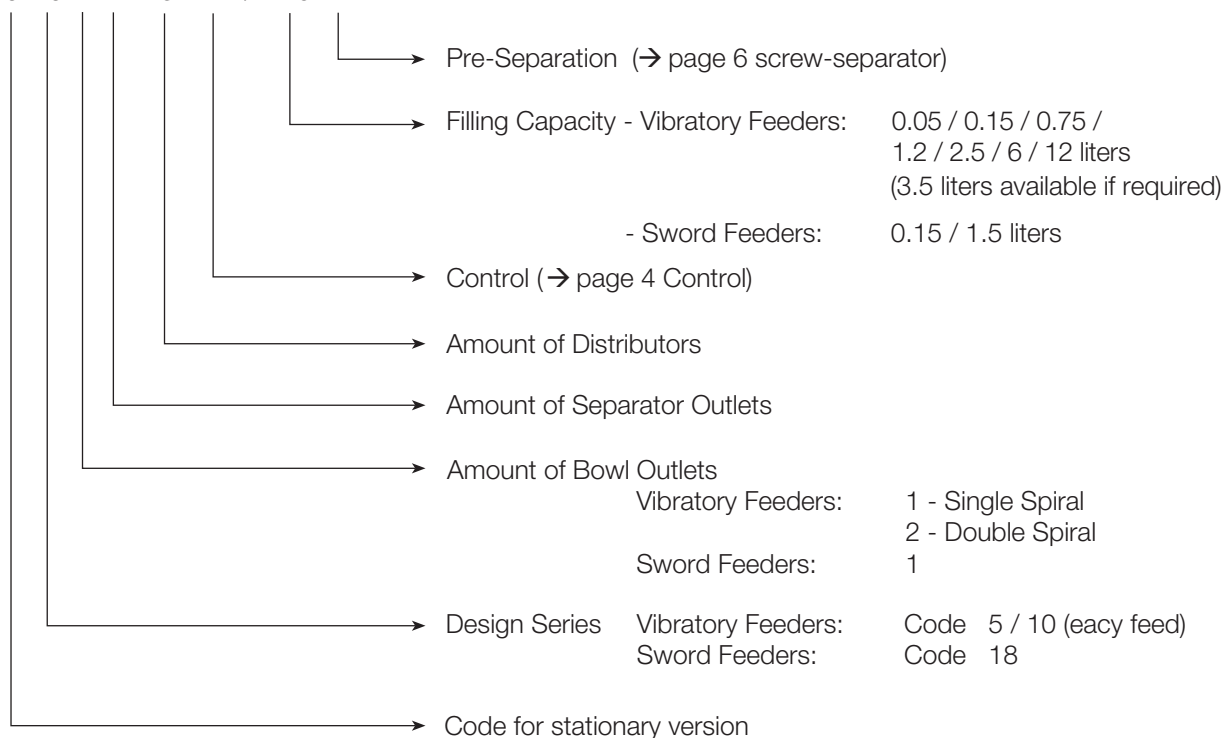

GUIDELINE FOR THE SELECTION OF A SUITABLE SCREWFEEDER

STEP 1: Feeding criteria

Basically all "shaft heavy" screws with heads which fulfil the following criteria are suitable for processing with our feed systems:

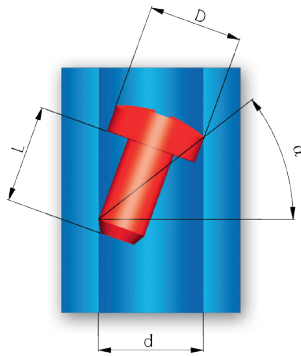

Feedability criteria:
 $\alpha > 30^\circ$

$d \sim D + 0.5 \text{ mm}$

Approximation formula:

$L > D + 2 \text{ mm}$

d = Feed hose ID
D = Screw head-Ø
L = Shaft length

STEP 2: Screw Quality

DIN quality standard fasteners (allowable 3% bad parts) is not always sufficient for reliable feeding machines.

Higher levels of screw/fastener quality improve the feeder's reliability.


The goal should be a quality grade of 10 ppm ("parts per million"). This means every 100,000 screws there can be 1 bad part.

STEP 3: Which feeding principle is best suited to your application?

A vibratory spiral bowl is particularly suited to screws with awkward dimensions or those with special feed rate requirements. The sword feeder is used when extremely gentle handling of the parts is required or when very low noise level is a must. If feeding with a hose system is not possible we also offer pick-and-place procedure.

STEP 4: Determine the screw receiver

At the end of the mouthpiece there is a nosepiece ball type (1 or 2 rows) or a nosepiece split type, mounted to receive and position the screw.

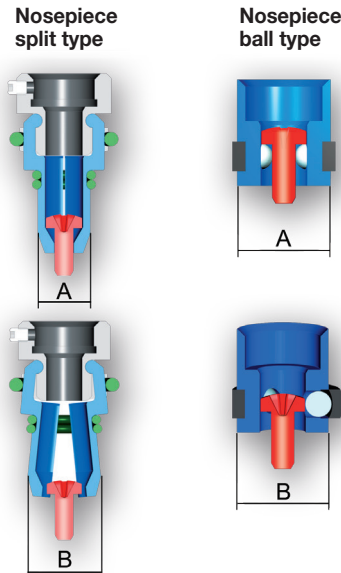

D = Head-Ø
d = Shaft-Ø
n = Space required to open

$A = D + 2.5 \text{ mm}$
 $B = A + D - d/2$

$B = 3D - 2d + 5 \text{ mm}$

$n = A \times B$

$n = \varnothing B$

STEP 5: Space available on the component

The available space around the screw head on the assembled components is very important for effective use of the handheld screw feeders. Both the nosepiece split type and ball type have space requirements.

STEP 6: Single or multiple feeding/screwdrivers

Single and double spiral bowls are available for vibratory bowl feeders. You can also get more out of each feeder with only one outlet using a distributor to further divide the feed parts into several hose outlets.

In this way up to twelve outlets can be created from just one feeder by using a double spiral bowl and 2 six-fold distributors. The selection of the correct feeder depends in particular on the cycle time required.

Please ask your local representative for further information.

STEP 7: Specifications

In order to design your feeder we need the following information from you:

- Number of screwdriving spindles to be used
- Cycle time (described in detail if possible)
- Feeding design (vibratory bowl feeder or sword feeder) if you have a preference
- Controller design (without valves as version „0“, with valves as version „P“ or with valves and sequence controller as version „EP“)
- Details of feed part geometry (e.g. dimension sheet of the screw with tolerances)
- Details of required length of feedhose(s) Details of the geometry of the screw-in position (3D model in format STEP or IGES)
- Voltage/mains frequency

To process your order we will also require approx. 1 sample load of parts to fill the capacity of your feeding system.

TECHNICAL DATA FEEDING MACHINES VIBRATORY BOWL FEEDERS

Filling capacity 0.05 liter – for screws with max. shaft length 8 mm

Filling capacity 0.05 liter / 0.01 gal.	Type	0611-P/0.05-x 0611-O/0.05-x
Amount of connectable drivers		1
Feed rate	parts/min	50
Filling capacity	liter/gal.	0.05/0.01
Max. head diameter	mm / in.	3 / 7/64
Max. shaft length	mm / in.	8 / 5/16
Range of shaft diameter	mm / in.	0.6 - 2.0 / 0.024-0.079
Voltage	V/Hz	230 / 50
Power consumption	W	50
Air pressure requirement	bar / PSI	6 / 85
Air hose dia.	mm / in.	4 / 5/32
Dimensions (W x D x H)	mm / in.	220 x 200 x 180 / 8 ⁵ / ₈ x 7 ⁷ / ₈ x 7 ¹ / ₁₆
Weight	kg / lbs	10 / 22
Feedhose length standard - max.	m / ft.	4 / 13.1 - 10 / 32.8
Number of in-/outputs needed for PLC Version "O" and "P"		2 / 4
Control Unit	Type	Piezo Controller, part no. 806652
Dimensions (L x W x H)	mm / in.	106 x 100 x 150 / 4 ¹¹ / ₆₄ x 3 ⁷ / ₈ x 5 ⁷ / ₈

*) The controller can be positioned either next to the feeder in the work area or in the control cabinet.

We recommend integration into the control cabinet. Additionally the height of the cable connections (approx 50mm) must be taken into account.



Filling capacity 0.15 liter – for screws with max. shaft length 8 mm

Filling capacity 0.15 l / 0.04 gal. with PLC	Type	01011 -EP/0.15	01022 -EP/0.15	01011-2 -EP/0.15	01011-3 -EP/0.15	01011-4 -EP/0.15	-	-
Control unit		PFC100 controller (insulation IP54)						
Filling capacity 0.15 l / 0.04 gal. without PLC	Type	01011 -0/0.15 -P/0.15 -0/0.15V -P/0.15V	01022 -0/0.15 -P/0.15 -0/0.15V -P/0.15V	01011 -2-0/0.15 -2-P/0.15 -2-0/0.15V -2-P/0.15V	01011 -3-0/0.15 -3-P/0.15 -3-0/0.15V -3-P/0.15V	01011 -4-0/0.15 -4-P/0.15 -4-0/0.15V -4-P/0.15V	01011 -5-0/0.15 -5-P/0.15 -5-0/0.15V -5-P/0.15V	01011 -6-0/0.15 -6-P/0.15 -6-0/0.15V -6-P/0.15V
Control unit		PFCi100 controller (insulation IP54)						
Filling capacity 0.15 l / 0.04 gal. without PLC (integrated version with regulation of the feeder controller directly via DEPRAG - PLC)	Type	01011i -0/0.15 -P/0.15 -0/0.15V -P/0.15V	01022i -0/0.15 -P/0.15 -0/0.15V -P/0.15V	01011i -2-0/0.15 -2-P/0.15 -2-0/0.15V -2-P/0.15V	01011i -3-0/0.15 -3-P/0.15 -3-0/0.15V -3-P/0.15V	01011i -4-0/0.15 -4-P/0.15 -4-0/0.15V -4-P/0.15V	01011i -5-0/0.15 -5-P/0.15 -5-0/0.15V -5-P/0.15V	01011i -6-0/0.15 -6-P/0.15 -6-0/0.15V -6-P/0.15V
Control unit		PFCi100 controller (insulation IP54)						
Amount of connectable drivers		1	2	2	3	4	5	6
Feed rate	parts/min	60	2x60	2x25	3x17	4x13	5x10	6x8
Filling capacity	liter / gal.	0.15 / 0.04	0.15 / 0.04	0.15 / 0.04	0.15 / 0.04	0.15 / 0.04	0.15 / 0.04	0.15 / 0.04
Max. head diameter	mm / in.	5 / 13/64	4 / 5/32	5 / 13/64	5 / 13/64	5 / 13/64	5 / 13/64	5 / 13/64
Max. shaft length	mm / in.	8 / 5/16	8 / 5/16	8 / 5/16	8 / 5/16	8 / 5/16	8 / 5/16	8 / 5/16
Range of shaft diameter	mm / in.	1.2 - 2.5 / 0.046 - 0.1						
Voltage	V	24 Volt DC						
Max. power consumption	VA	50						
Air pressure requirement	bar / PSI	6 / 85.2						
Air hose dia.	mm / in.	10 / 3/8						
Weight approx.	kg / lbs.	26 / 57.2	28 / 61.6	28 / 61.6	29 / 63.8	30 / 66	31 / 68.2	32 / 70.4
Dimensions (WxDxH) approx.	mm / in.	296 x 352 x 258 / 11.54 x 13.73 x 10.06						
Feedhose length standard	m / ft.	4 / 13.1						
max.	m / ft.	8 / 26.2						
Number of in-/outputs needed for PLC	version „O“ and „P“	3/5	6/8	6/7	8/9	10/9	12/11	13/11
	version „EP“	2/1	3/2	3/1	4/1	5/1	-	-
	additional version „V“	4/6	8/10	8/9	11/12	14/13	17/16	19/17
Included in delivery		Power unit 105535A						
Required accessories		Power cable 812587 (EU) / 812295 (US)						
Optional accessories		see page 14						

TECHNICAL DATA FEEDING MACHINES VIBRATORY BOWL FEEDERS



**Filling capacity 0.75 liter – for screws with max. shaft length 35 mm
– for small components**

Filling capacity 0.75 l / 0.2 gal. with PLC	Type	01011 -EP/0.75	01022 -EP/0.75	-	-	01011-2 -EP/0.75	01011-3 -EP/0.75	01011-4 -EP/0.75	-	-
Control unit		PFC100 controller (insulation IP54)								
Filling capacity 0.75 l / 0.2 gal. without PLC	Type	01011 -0/0.75 -P/0.75 -0/0.75V -P/0.75V	01022 -0/0.75 -P/0.75 -0/0.75V -P/0.75V	01012 -0/0.75 -P/0.75 -0/0.75V -P/0.75V	01024 -0/0.75 -P/0.75 -0/0.75V -P/0.75V	01011 -2-0/0.75 -2-P/0.75 -2-0/0.75V -2-P/0.75V	01011 -3-0/0.75 -3-P/0.75 -3-0/0.75V -3-P/0.75V	01011 -4-0/0.75 -4-P/0.75 -4-0/0.75V -4-P/0.75V	01011 -5-0/0.75 -5-P/0.75 -5-0/0.75V -5-P/0.75V	01011 -6-0/0.75 -6-P/0.75 -6-0/0.75V -6-P/0.75V
Control unit		PFC100 controller (insulation IP54)								
Filling capacity 0.75 l / 0.2 gal. without PLC (integrated version with regulation of the feeder controller directly via DEPRAG - PLC)	Type	01011i -0/0.75 -P/0.75 -0/0.75V -P/0.75V	01022i -0/0.75 -P/0.75 -0/0.75V -P/0.75V	01012i -0/0.75 -P/0.75 -0/0.75V -P/0.75V	01024i -0/0.75 -P/0.75 -0/0.75V -P/0.75V	01011i -2-0/0.75 -2-P/0.75 -2-0/0.75V -2-P/0.75V	01011i -3-0/0.75 -3-P/0.75 -3-0/0.75V -3-P/0.75V	01011i -4-0/0.75 -4-P/0.75 -4-0/0.75V -4-P/0.75V	01011i -5-0/0.75 -5-P/0.75 -5-0/0.75V -5-P/0.75V	01011i -6-0/0.75 -6-P/0.75 -6-0/0.75V -6-P/0.75V
Control unit		PFCi100 controller (insulation IP54)								
Amount of connectable drivers		1	2	2	4	2	3	4	5	6
Feed rate	parts/min	40	2x40	2x20	4x20	2x20	3x13	4x10	5x8	6x6
Filling capacity	liter / gal.	0.75 / 0.2	0.75 / 0.2	0.75 / 0.2	0.75 / 0.2	0.75 / 0.2	0.75 / 0.2	0.75 / 0.2	0.75 / 0.2	0.75 / 0.2
Max. head diameter	mm / in.	12 / ¹⁵ / ₃₂	8 / ⁵ / ₁₆	12 / ¹⁵ / ₃₂	8 / ¹⁵ / ₃₂	12 / ¹⁵ / ₃₂	12 / ¹⁵ / ₃₂	12 / ¹⁵ / ₃₂	12 / ¹⁵ / ₃₂	12 / ⁵ / ₃₂
Max. shaft length	mm / in.	35 / 1 ³ / ₈	25 / ³¹ / ₃₂	35 / 1 ³ / ₈	25 / ³¹ / ₃₂	35 / 1 ³ / ₈	35 / 1 ³ / ₈	35 / 1 ³ / ₈	35 / 1 ³ / ₈	35 / 1 ³ / ₈
Range of shaft diameter	mm / in.	1.5 - 7 / 0.06 - 0.27								
Voltage	V	24 Volt DC								
Max. power consumption	VA	50								
Air pressure requirement	bar / PSI	6 / 85.2								
Air hose dia.	mm / in.	10 / ³ / ₈								
Weight approx.	kg / lbs.	36 / 79.2	38 / 83.6	36 / 79.2	38 / 83.6	42 / 92.4	42 / 92.4	42 / 92.4	44 / 96.8	44 / 96.8
Dimensions (WxDxH) approx.	mm / in.	360 x 414 x 368 / 14.04 x 16.15 x 14.35								
Feedhose length standard	m / ft.	4 / 13.1								
Feedhose length max.	m / ft.	8 / 26.2								
Number of in-/outputs needed for PLC										
Version „0“ and „P“		3/5	6/8	8/10	16/18	6/7	8/9	10/9	12/11	13/11
Version „EP“		2/1	3/2	-	-	3/1	4/1	5/1	-	-
Additional version „V“		4/6	8/10	10/12	20/22	8/9	11/12	14/13	17/16	19/17

Also suitable for the feeding of: – rotation symmetric parts, such as rivets, bolts, pins, washers, sleeves, etc.
– small components
– balls and much more

The choice of feeding machine for small components will be determined after testing. Therefore, we require a sufficient quantity (approximately 1 liter/0.26 gal.) of the components to be fed.

Included in delivery	Power unit 105535A
-----------------------------	--------------------

Required accessories	
Power cable	Part no. 812587 (EU) / 812295 (US)

Optional accessories	see page 14
-----------------------------	-------------

i Our software solutions undergo continuous improvements. We recommend that you regularly update your software. In this way you will always receive the most up-to-date security updates, upgraded features and drivers. With the most current version of the software you can be sure that your device is optimally prepared for Industry 4.0.

TECHNICAL DATA FEEDING MACHINES VIBRATORY BOWL FEEDERS



Filling capacity 1.2 liter – for screws with max. shaft length 50 mm


Filling capacity 1.2 l / 0.32 gal. with PLC	Type	01011 -EP/1.2	01011-2 -EP/1.2	01011-3 -EP/1.2	01011-4 -EP/1.2	-	-
Control unit		PFC100 controller (insulation IP54)					
Filling capacity 1.2 l / 0.32 gal. without PLC	Type	01011 -0/1.2 -P/1.2 -0/1.2V -P/1.2V	01011 -2-0/1.2 -2-P/1.2 -2-0/1.2V -2-P/1.2V	01011 -3-0/1.2 -3-P/1.2 -3-0/1.2V -3-P/1.2V	01011 -4-0/1.2 -4-P/1.2 -4-0/1.2V -4-P/1.2V	01011 -5-0/1.2 -5-P/1.2 -5-0/1.2V -5-P/1.2V	01011 -6-0/1.2 -6-P/1.2 -6-0/1.2V -6-P/1.2V
Control unit		PFC100 controller (insulation IP54)					
Filling capacity 1.2 l / 0.32 gal. without PLC integrated version with regulation of the feeder controller directly via DEPRAG - PLC)	Type	01011i -0/1.2 -P/1.2 -0/1.2V -P/1.2V	01011i -2-0/1.2 -2-P/1.2 -2-0/1.2V -2-P/1.2V	01011i -3-0/1.2 -3-P/1.2 -3-0/1.2V -3-P/1.2V	01011i -4-0/1.2 -4-P/1.2 -4-0/1.2V -4-P/1.2V	01011i -5-0/1.2 -5-P/1.2 -5-0/1.2V -5-P/1.2V	01011i -6-0/1.2 -6-P/1.2 -6-0/1.2V -6-P/1.2V
Control unit		PFCi100 controller (insulation IP54)					
Amount of connectable drivers		1	2	3	4	5	6
Feed rate	parts/min	25	2x12	3x8	4x6	5x5	6x4
Filling capacity	liter / gal.	1.2 / 0.32	1.2 / 0.32	1.2 / 0.32	1.2 / 0.32	1.2 / 0.32	1.2 / 0.32
Max. head diameter	mm / in.				16 / ⁵ / ₈		
Max. shaft length	mm / in.				50 / 1 ⁵ / ₁₆		
Range of shaft diameter	mm / in.				3 - 7 / 0.118 - 0.276		
Voltage	V				24 Volt DC		
Max. power consumption	VA				150		
Air pressure requirement	bar / PSI				6 / 85.2		
Air hose dia.	mm / in.				10 / ³ / ₈		
Weight approx.	kg / lbs.	40 / 88	46 / 101.2	46 / 101.2	46 / 101.2	48 / 105.6	48 / 105.6
Dimensions (WxDxH) approx.	mm / in.				360 x 414 x 368 / 14.04 x 16.15 x 14.35		
Feedhose length standard	m / ft.				4 / 13.1		
max.	m / ft.				8 / 26.2		
Number of in-/outputs needed for PLC							
Version „0“ and „P“		3/5	6/7	8/9	10/9	12/11	13/11
Version „EP“		2/1	3/1	4/1	5/1	-	-
Additional version „V“		4/6	8/9	11/12	14/13	17/16	19/17
Included in delivery		Power unit 2041061					

Required accessories

Power cable	Part no.	812587 (EU) / 812295 (US)
-------------	----------	---------------------------

Optional accessories

see page 14

 Our software solutions undergo continuous improvements. We recommend that you regularly update your software. In this way you will always receive the most up-to-date security updates, upgraded features and drivers. With the most current version of the software you can be sure that your device is optimally prepared for Industry 4.0.

TECHNICAL DATA FEEDING MACHINES VIBRATORY BOWL FEEDERS



**Filling capacity 2.5 liter – for screws with max. shaft length 60 mm
– for small components**

Filling capacity 2.5 l / 0.66 gal. with PLC	Type	01011 -EP/2.5	01022 -EP/2.5	-	-	01011-2 -EP/2.5	01011-3 -EP/2.5	01011-4 -EP/2.5	-	-
Control unit		PFC100 controller (insulation IP54)								
Filling capacity 2.5 l / 0.66 gal. without PLC	Type	01011 -0/2.5 -P/2.5 -0/2.5V -P/2.5V	01022 -0/2.5 -P/2.5 -0/2.5V -P/2.5V	01012 -0/2.5 -P/2.5 -0/2.5V -P/2.5V	01024 -0/2.5 -P/2.5 -0/2.5V -P/2.5V	01011 -2-0/2.5 -2-P/2.5 -2-0/2.5V -2-P/2.5V	01011 -3-0/2.5 -3-P/2.5 -3-0/2.5V -3-P/2.5V	01011 -4-0/2.5 -4-P/2.5 -4-0/2.5V -4-P/2.5V	01011 -5-0/2.5 -5-P/2.5 -5-0/2.5V -5-P/2.5V	01011 -6-0/2.5 -6-P/2.5 -6-0/2.5V -6-P/2.5V
Control unit		PFC100 controller (insulation IP54)								
Filling capacity 2.5 l / 0.66 gal. without PLC (integrated version with regulation of the feeder controller directly via DEPRAG - PLC)	Type	01011i -0/2.5 -P/2.5 -0/2.5V -P/2.5V	01022i -0/2.5 -P/2.5 -0/2.5V -P/2.5V	01012i -0/2.5 -P/2.5 -0/2.5V -P/2.5V	01024i -0/2.5 -P/2.5 -0/2.5V -P/2.5V	01011i -2-0/2.5 -2-P/2.5 -2-0/2.5V -2-P/2.5V	01011i -3-0/2.5 -3-P/2.5 -3-0/2.5V -3-P/2.5V	01011i -4-0/2.5 -4-P/2.5 -4-0/2.5V -4-P/2.5V	01011i -5-0/2.5 -5-P/2.5 -5-0/2.5V -5-P/2.5V	01011i -6-0/2.5 -6-P/2.5 -6-0/2.5V -6-P/2.5V
Control unit		PFCi100 controller (insulation IP54)								
Amount of connectable drivers		1	2	2	4	2	3	4	5	6
Feed rate	parts/min	40	2x40	2x20	4x20	2x20	3x13	4x10	5x8	6x6
Filling capacity	liter / gal.	2.5 / 0.66	2.5 / 0.66	2.5 / 0.66	2.5 / 0.66	2.5 / 0.66	2.5 / 0.66	2.5 / 0.66	2.5 / 0.66	2.5 / 0.66
Max. head diameter	mm / in.	16 / 5/8	14 / 35/64	16 / 5/8	14 / 35/64	16 / 5/8	16 / 5/8	16 / 5/8	15 / 19/32	16 / 5/8
Max. shaft length	mm / in.	60 / 2 23/64	45 / 1 49/64	60 / 2 23/64	45 / 1 49/64	60 / 2 23/64	60 / 2 23/64	60 / 2 23/64	60 / 2 23/64	60 / 2 23/64
Range of shaft diameter	mm / in.	4 - 8 / 5/32 - 5/16								
Voltage	V	24 Volt DC								
Max. power consumption	VA	150								
Air pressure requirement	bar / PSI	6 / 85.2								
Air hose dia.	mm / in.	10 / 3/8								
Weight approx.	kg / lbs.	60 / 132								
Dimensions (WxDxH) approx.	mm / in.	547 x 600 x 294 / 21.33 x 23.4 x 11.5								
Feedhose length standard	m / ft.	4 / 13.1								
max.	m / ft.	8 / 26.2								
Number of in-/outputs needed for PLC										
Version „0“ and „P“		3/5	6/8	8/10	16/18	6/7	8/9	10/9	12/11	13/11
Version „EP“		2/1	3/2	-	-	3/1	4/1	5/1	-	-
Additional version „V“		4/6	8/10	10/12	20/22	8/9	11/12	14/13	17/16	19/17

Also suitable for the feeding of: – rotation symmetric parts, such as rivets, bolts, pins, washers, sleeves, etc.
– small components
– balls and much more

The choice of feeding machine for small components will be determined after testing. Therefore, we require a sufficient quantity (approximately 1 liter/0.26 gal.) of the components to be fed.

Included in delivery	Power unit 2041061
-----------------------------	--------------------

Required accessories	
Power cable	Part no. 812587 (EU) / 812295 (US)

Optional accessories	see page 14
-----------------------------	-------------

Our software solutions undergo continuous improvements. We recommend that you regularly update your software. In this way you will always receive the most up-to-date security updates, upgraded features and drivers. With the most current version of the software you can be sure that your device is optimally prepared for Industry 4.0.

TECHNICAL DATA FEEDING MACHINES VIBRATORY BOWL FEEDERS

Filling capacity 6.0 liter – for screws with max. shaft length 100 mm

Filling capacity 6 liter / 1.6 gal.	Type	0511-O/6.0	0511-2-O/6.0	0511-3-O/6.0	0511-4-O/6.0	0511-5-O/6.0	0511-6-O/6.0
		0511-P/6.0	0511-2-P/6.0 0511-2-O/6.0V 0511-2-P/6.0V	0511-3-P/6.0 0511-3-O/6.0V 0511-3-P/6.0V	0511-4-P/6.0 0511-4-O/6.0V 0511-4-P/6.0V	0511-5-P/6.0 0511-5-O/6.0V 0511-5-P/6.0V	0511-6-P/6.0 0511-6-O/6.0V 0511-6-P/6.0V
Amount of connectable drivers		1	2	3	4	5	6
Feed rate	parts/min	25	2 x 12	3 x 8	4 x 6	5 x 5	6 x 4
Filling capacity	liter / gal.				6 / 1.6		
Max. head diameter	mm / in.				30 / 1 ³ / ₁₆		
Max. shaft length	mm / in.				100 / 4		
Range of shaft diameter	mm / in.				8 - 16 / 0.315 - 0.63		
Air pressure requirement	bar / PSI				6.3 / 90		
Air hose dia.	mm / in.				10 / ³ / ₈		
Weight (design "O")	kg / lbs.				250 / 550		
Feedhose length	standard max				4 / 13.1 8 / 26.2		
Number of in-/outputs needed for PLC							
Version "O" and "P"	min.	2/6	5/8	7/10	9/10	11/12	12/12
Version "V"	min.	–	7/10	10/13	13/14	16/17	18/18
Control unit		SZG controller 5-SL (insulation IP54)					

Filling capacity 12.0 liter – for screws with max. shaft length 130 mm

Filling capacity 12 liter / 3.2 gal	Type	0511	0511	0512	0522	0511	0511
		-O/12 -P/12	-2-O/12 -2-P/12 -2-O/12 V -2-P/12 V	-O/12 -P/12 -O/12 V -P/12 V	-O/12 -P/12	-3-O/12 -3-P/12 -3-O/12 V -3-P/12 V	-4-O/12 -4-P/12 -4-O/12 V -4-P/12 V
Amount of connectable drivers		1	2	2	2	3	4
Preferred type for identical amount of spindles			●				
Feed rate	parts/min	20	2 x 10	2 x 11	2 x 20	3 x 7	4 x 5
Filling capacity	liter / gal.	12 / 3.2	12 / 3.2	12 / 3.2	12 / 3.2	12 / 3.2	12 / 3.2
Max. head diameter	mm / in.	40 / 1 ³⁷ / ₆₄	40 / 1 ³⁷ / ₆₄	40 / 1 ³⁷ / ₆₄	30 / 1 ³ / ₁₆	40 / 1 ³⁷ / ₆₄	40 / 1 ³⁷ / ₆₄
Max. shaft length	mm / in.	130 / 5 ¹ / ₈	130 / 5 ¹ / ₈	130 / 5 ¹ / ₈	120 / 4 ²³ / ₃₂	130 / 5 ¹ / ₈	130 / 5 ¹ / ₈
Range of shaft diameter	mm / in.	14-20 / ³⁵ / ₆₄ - ²⁵ / ₃₂	14-20 / ³⁵ / ₆₄ - ²⁵ / ₃₂	14-20 / ³⁵ / ₆₄ - ²⁵ / ₃₂	12-18 / ¹⁵ / ₃₂ - ⁴⁵ / ₆₄	14-20 / ³⁵ / ₆₄ - ²⁵ / ₃₂	14-20 / ³⁵ / ₆₄ - ²⁵ / ₃₂
Air pressure requirement	bar / PSI	6.3 / 90	6.3 / 90	6.3 / 90	6.3 / 90	6.3 / 90	6.3 / 90
Air hose dia.	mm / in.	10 / ³ / ₈	10 / ³ / ₈	10 / ³ / ₈	10 / ³ / ₈	10 / ³ / ₈	10 / ³ / ₈
Weight	kg / lbs	as per customer's specification approx. 500					
Feedhose length	standard max	4 / 13.1 8 / 26.2	4 / 13.1 8 / 26.2	4 / 13.1 8 / 26.2	4 / 13.1 8 / 26.2	4 / 13.1 8 / 26.2	4 / 13.1 8 / 26.2
Number of in-/outputs needed for PLC							
Version "O" and "P"	min.	5/6	8/8	6/7	9/9	11/10	12/10
Version "V"	min.	–	10/10	8/9	–	14/13	16/14
Control unit for vibratory conveyor		Special controller					
Control unit for linear conveyor		Special controller					

TECHNICAL DATA FEEDING MACHINES SWORD FEEDERS

Filling capacity 0.15 liter – for screws with max. shaft length 8 mm

Filling capacity 0.15 liter / 0.04 gal	Type	0811-O/0.15 0811-P/0.15
Amount of connectable drivers		1
Feed rate	parts/min	30
Filling capacity	liter / gal.	0.15 / 0.04
Max. head diameter	mm / in.	5 / ¹⁹ / ₆₄
Max. shaft length	mm / in.	8 / ⁵ / ₁₆
Range of shaft diameter	mm / in.	1.0 - 2.5 / ³ / ₆₄ - ³ / ₃₂
Air pressure requirement	bar / PSI	6.3 / 90
Air hose dia.	mm / in.	10 / ²⁵ / ₆₄
Weight	kg / lbs	6 / 13.2
Feedhose length standard	m / ft.	4 / 13.1
max	m / ft.	5 / 16.4
Number of in-/outputs needed for PLC Version "O" and "P"	min.	4/5

Filling capacity 1.5 liter – for screws with max. shaft length 25 mm

Filling capacity	1.5 liter / 0.4 gal						
with PLC, control unit PFC18L Con- troller (insulation IP30)	Type	01811-EP/1.5	-	-	-	-	-
without PLC, without control unit (control via external PLC)	Type	01811-O/1.5 01811-P/1.5	01811-2-O/1.5 01811-2-P/1.5 01811-2-O/1.5V 01811-2-P/1.5V	01811-3-O/1.5 01811-3-P/1.5 01811-3-O/1.5V 01811-3-P/1.5V	01811-4-O/1.5 01811-4-P/1.5 01811-4-O/1.5V 01811-4-P/1.5V	01811-5-O/1.5 01811-5-P/1.5 01811-5-O/1.5V 01811-5-P/1.5V	01811-6-O/1.5 01811-6-P/1.5 01811-6-O/1.5V 01811-6-P/1.5V
Amount of connectable drivers		1	2	3	4	5	6
Feed rate	parts/min	30	2 x 15	3 x 10	4 x 8	5 x 6	6 x 5
Filling capacity	liter / gal.				1.5 / 0.4		
Max. head diameter	mm / in.				12 / ¹⁵ / ₃₂		
Max. shaft length	mm / in.				25 / ⁶³ / ₆₄		
Range of shaft diameter	mm / in.				2 - 6.3 / 0.08 - 0.25		
Voltage	V				24 Volt DC		
Max. power consumption	VA				50		
Air pressure requirement	bar / PSI				6 / 85.2		
Air hose dia.	mm / in.				10 / ³ / ₈		
Dimensions (WxDxH) approx.	mm / in.				408 x 666 x 1223 / 15.9 x 25.97 x 47.7		
Weight (design "O")	kg / lbs	35/77	38/84	40/88	40/88	42/92	42/92
Feedhose length standard	m / ft.	4/13.1	4/13.1	4/13.1	4/13.1	4/13.1	4/13.1
max	m / ft.	8/26.2	8/26.2	8/26.2	8/26.2	8/26.2	8/26.2
Number of in-/outputs needed for PLC Version "O" and "P"	min.	8/6	11/9	13/12	15/13	17/16	18/17
Version "V"	min.	-	11/9	13/12	15/13	17/16	18/17
Version "EP"	min.	3/1	-	-	-	-	-
Included in delivery (only for type 01811-EP/1.5)	Power unit	105535A			-		
Required accessories (only for type 01811-EP/1.5)	Part no.	812587 (EU) 812295 (US)			-		

Optional accessories

see page 14

TECHNICAL DATA NUT FEEDERS (VIBRATORY BOWL FEEDERS)

Filling capacity 0.75 / 2.5 liter – maximum permissible nut height 5 mm / 8 mm



Filling capacity	0.75 liter / 0.2 gal.			2.5 liter / 0.66 gal.			
with PLC	Type	01011M -EP/0.75	-	-	01011M -EP/2.5	-	
Control unit	PFC100 controller (insulation IP54)						
without PLC	Type	01011M -0/0.75 -P/0.75 -0/0.75V -P/0.75V	01012M -0/0.75 -P/0.75 -0/0.75V -P/0.75V	01024M -0/0.75 -P/0.75 -0/0.75V -P/0.75V	01011M -0/2.5 -P/2.5 -0/2.5V -P/2.5V	01012M -0/2.5 -P/2.5 -0/2.5V -P/2.5V	01024M -0/2.5 -P/2.5 -0/2.5V -P/2.5V
Control unit	PFC100 controller (insulation IP54)						
without PLC	Type	01011iM -0/0.75 -P/0.75 -0/0.75V -P/0.75V	01012iM -0/0.75 -P/0.75 -0/0.75V -P/0.75V	01024iM -0/0.75 -P/0.75 -0/0.75V -P/0.75V	01011iM -0/2.5 -P/2.5 -0/2.5V -P/2.5V	01012iM -0/2.5 -P/2.5 -0/2.5V -P/2.5V	01024iM -0/2.5 -P/2.5 -0/2.5V -P/2.5V
(integrated version with regulation of the feeder controller directly via external PLC)							
Control unit	PFCi100 controller (insulation IP54)						
Amount of connectable drivers		1	2	4	1	2	4
Feed rate	parts/min	40	2x25	4x25	40	2x25	4x25
Filling capacity	liter / gal.	0.75 / 0.2	0.75 / 0.2	0.75 / 0.2	2.5 / 0.66	2.5 / 0.66	2.5 / 0.66
Across flats	mm / in.	4-8 / ⁵ / _{32-⁵/₁₆}	4-8 / ⁵ / _{32-⁵/₁₆}	4-8 / ⁵ / _{32-⁵/₁₆}	5.5-17 / ⁵ / _{32-⁴³/₆₄}	5.5-13 / ⁵ / _{32-¹/₂}	5.5-13 / ⁵ / _{32-¹/₂}
Female thread	mm / in.	3-5 / ¹ / _{8-³/₁₆}	3-5 / ¹ / _{8-³/₁₆}	3-5 / ¹ / _{8-³/₁₆}	3-8 / ¹ / _{8-⁵/₁₆}	3-8 / ¹ / _{8-⁵/₁₆}	3-8 / ¹ / _{8-⁵/₁₆}
Max. possible nut height	mm / in.	5 / ³ / ₁₆	5 / ³ / ₁₆	5 / ³ / ₁₆	8 / ⁵ / ₁₆	8 / ⁵ / ₁₆	8 / ⁵ / ₁₆
Voltage	V	24 Volt DC			24 Volt DC		
Max. power consumption	VA	50			150		
Air pressure requirement	bar / PSI	6 / 85.2			6 / 85.2		
Air hose dia.	mm / in.	10 / ³ / ₈			10 / ³ / ₈		
Dimensions (WxDxH) approx.	mm / in.	360 x 414 x 368 / 14.04 x 16.15 x 14.35			547 x 600 x 294 / 21.33 x 23.4 x 11.5		
Number of in-/outputs needed for PLC							
Version „O“ and „P“		3/5	4/6	8/10	3/5	4/6	7/14
Version „EP“		2/1	-	-	2/1	-	-
Additional version „V“		4/6	6/8	10/12	4/6	6/8	11/18
Included in delivery		Power unit 105535A			Power unit 2041061		
Required accessories							
Power cable	Part no.	812587 (EU) / 812295 (US)			812587 (EU) / 812295 (US)		
Optional accessories		see page 14					

POWER USAGE

The design of the feeding systems can be made for either 230 volts or for 115 volts of power-connection.

For the corresponding maximum usage (in W) please refer to the listing below.

Unit	Type	010xx-x/0.15	010xx-x/0.75	010xx-x/1.2	010xx-x/2.5	05xx-x/6.0	018xx-x/1.5
Voltage	V	24 Volt DC	24 Volt DC	24 Volt DC		115 or 230	24 Volt DC
Power consumption	W	50	50	150		550	50
Unit	Type	0811-O/0.15	0811-P/0.15				
Power supply	V	not applicable	24				
Power consumption	W	0	10				

OPTIONAL EQUIPMENT for feeding systems

Ring proximity switch with impulse extension 100 ms, with connector, cable and connector plug for screw presence control installed and wired

Feeder bowl, coated with polyurethane / Hopper (catalog D3850E) / Downholder (for screws with washers)


"Semi-pick-and-place-system" / Set of wheels for stand / Set of wheels for stand in ESD-capable version

for feeding systems with feed bowl volume		0.15 liter	0.75 liter	1.2 liter	1.5 liter	2.5 liter
Fill level indicator	Part no.	414965J	414965A	414965A	420494B	414965D
Stand	Part no.	994449	994449	994449	994449	999309
Retaining plate (holder for power supply)	Part no.	9198574	9198574	9198573	9198574	-


Our software solutions undergo continuous improvements. We recommend that you regularly update your software. In this way you will always receive the most up-to-date security updates, upgraded features and drivers. With the most current version of the software you can be sure that your device is optimally prepared for Industry 4.0.

DIMENSIONS


Vibratory Bowl Feeder

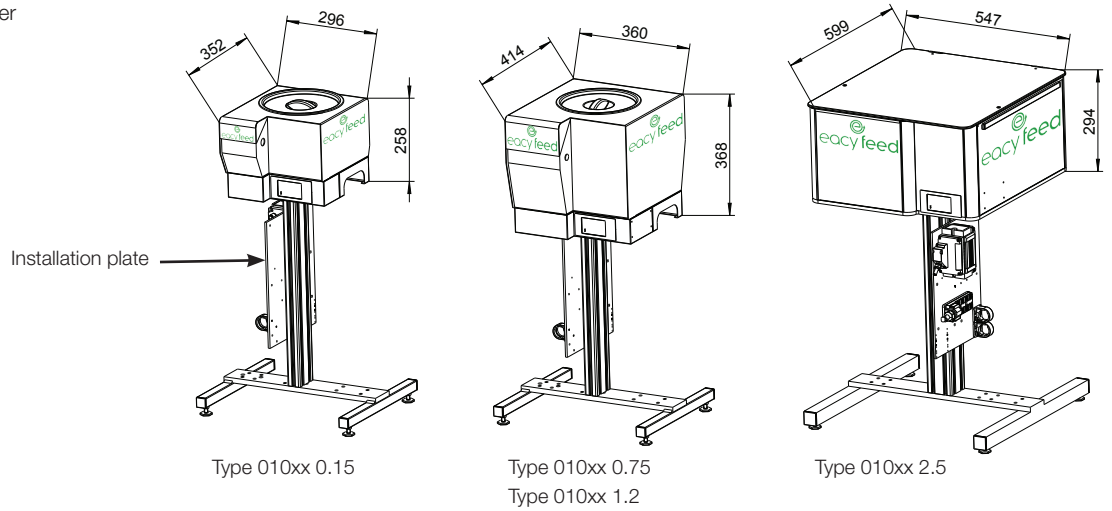


Sword Feeder

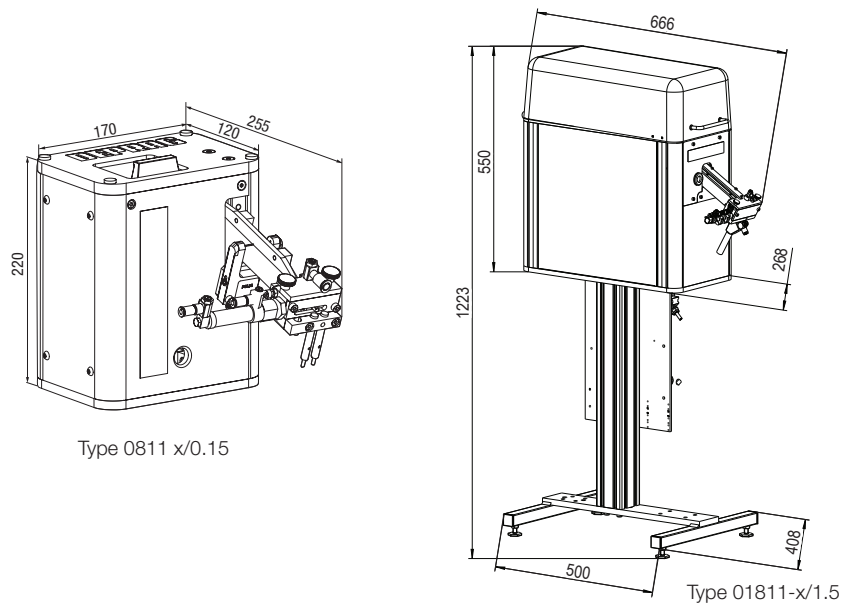

Vibratory Bowl Feeder with Belt-Driven Hopper

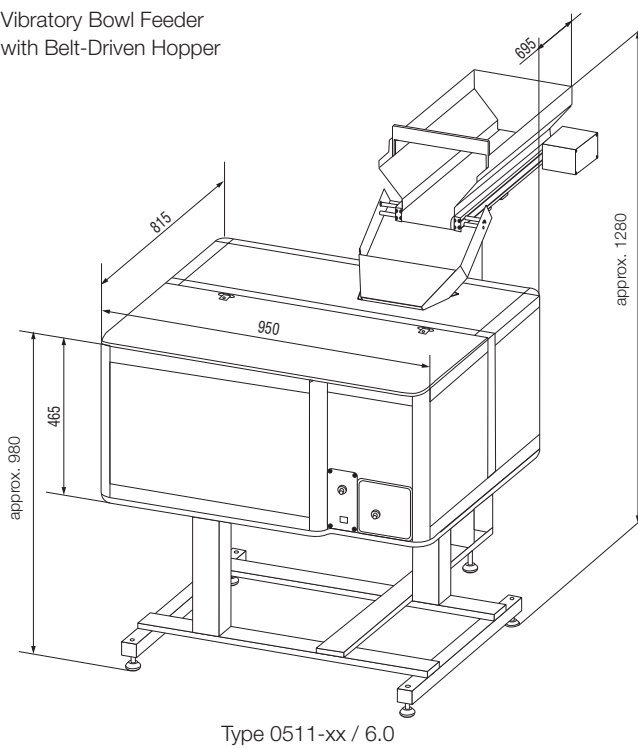

Vibratory Bowl Feeder

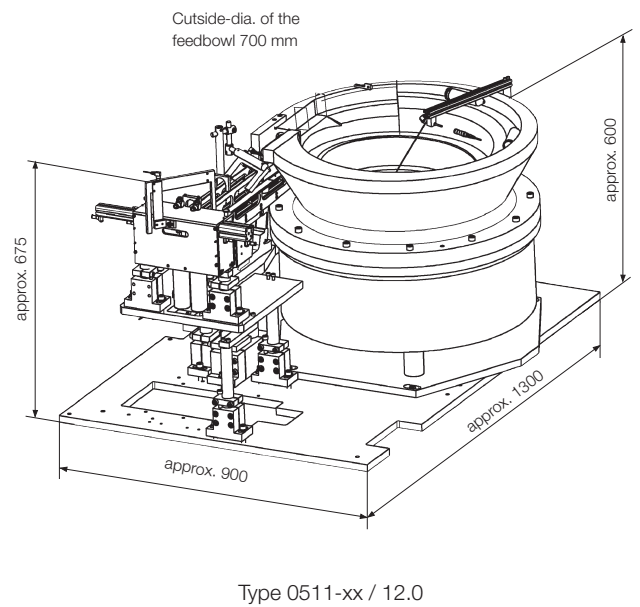

DEPRAG

DEPRAG SCHULZ GMBH u. CO. KG

P.O. Box 1352 | D-92203 Amberg

Carl-Schulz-Platz 1 | D-92224 Amberg

Phone: +49 9621 371-0 | Fax: +49 9621 371-120

www.deprag.com | info@deprag.de

CERTIFIED AS PER DIN EN ISO 9001
